


PE.SEB SS.PE.SEB


METRIC THREADS

FALL PROTECTION ANCHORAGE POINT

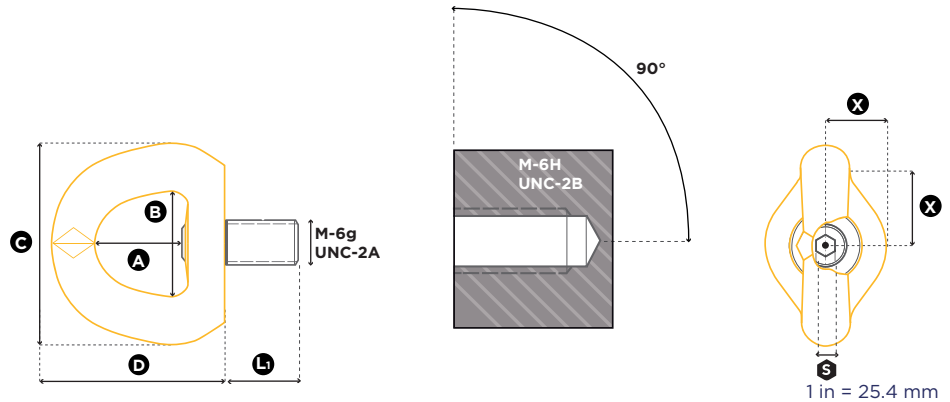

Reference	Diameter	Number of persons	Standard L ₁ (mm)	Torque (Nm)		S (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
PE.SEB M 12	M 12 (x1,75)	1 pers.	21	15	20	6	30	34	60	57	0,24
PE.SEB M 16	M 16 (x2)	1-2 pers.*	27	50	35	8	38	45	88	80	0,80
PE.SEB M 20	M 20 (x2,5)	1-2 pers.*	30	100	35	8	38	45	88	80	0,80

* The DIN CEN / TS 16415:2013-04 allows use for more than one person. / La norme DIN CEN / TS 16415:2013-04 prévoit l'utilisation pour plus d'une personne. / Die DIN CEN/TS 16415:2013-04 gestattet eine Benutzung von mehrere Personen. / La norma DIN CEN/TS 16415:2013-04 autoriza una utilización para varias personas.

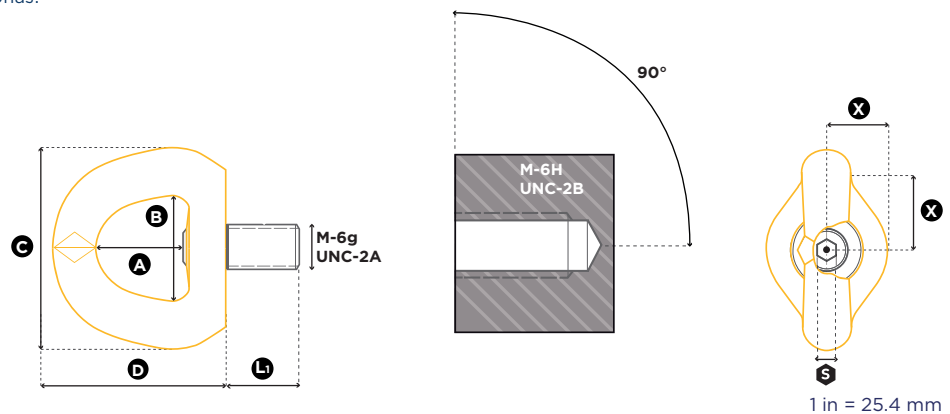

Reference	Diameter	Number of persons	Standard L ₁ (mm)	Torque (Nm)		S (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
SS.PE.SEB M 12	M 12 (x1,75)	1 pers.	21	15	20	8	38	45	90	80	0,80
SS.PE.SEB M 16	M 16 (x2)	1-2 pers.*	27	50	35	8	38	45	90	80	0,82
SS.PE.SEB M 20	M 20 (x2,5)	1-2 pers.*	30	100	35	8	38	45	90	80	0,84
SS.PE.SEB M 24	M 20 (x3)	1-2 pers.*	36	150	50	8	38	45	90	80	0,90

Comply to EN 795:2012. Please read our user's manual before use. / Conforme à la norme EN 795:2012. Consulter la notice d'instruction avant utilisation. / Entsprechend EN 795:2012. Bitte beachten Sie die Gebrauchsanweisung vor jeder Anwendung. / Conforme a la EN 795:2012. Consultar el manual de instrucciones antes de utilizar el producto.

01.2018