


Open Swage Sockets

Product Description

- ✓ Manufactured in USA
- ✓ Made from Carbon Steel
- ✓ Available for rope sizes 6mm to 76mm

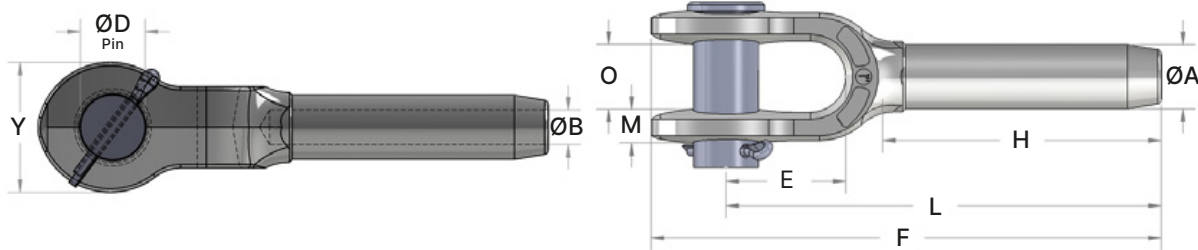

Rope Diameter (in)	Rope Diameter (mm)	A	BØ	DØ	E	F	H	L	M	O	Y	Weight (kg)	After Swage	
													Min	Max
1/4	6 - 7	12.6	6.9	17.5	38.1	120.7	54.0	101.6	7.9	17.5	34.9	0.3	10.9	11.7
5/16	8	19.6	8.6	20.6	44.5	158.8	81.0	134.9	10.3	20.6	41.3	0.6	17.2	18.0
3/8	9 - 10	19.6	10.3	20.6	44.5	158.8	81.0	134.9	10.3	20.6	41.3	0.5	17.2	18.0
7/16	11	24.9	12.3	25.4	50.8	198.4	108.0	169.9	12.7	25.4	50.8	1.1	22.0	23.1
1/2	12 - 13	24.9	13.9	25.4	50.8	198.4	108.0	169.9	12.7	25.4	50.8	1.1	22.0	23.1
9/16	14 - 15	31.9	15.5	30.2	57.2	242.9	134.9	206.4	15.9	31.8	63.5	2.2	28.3	29.5
5/8	16	31.9	17.1	30.2	57.2	242.9	134.9	206.4	15.9	31.8	63.5	2.0	28.3	29.5
3/4	18 - 20	39.2	20.2	35.1	69.9	296.9	161.9	254.0	19.1	38.1	76.2	3.5	34.7	36.1
7/8	22 - 23	43.2	23.8	41.4	82.6	346.1	188.9	295.3	23.8	44.5	85.7	5.4	37.8	39.4
1	24 - 25	50.2	27.0	50.8	95.3	396.9	215.9	339.7	26.2	50.8	101.6	8.1	44.2	45.7
1 - 1/8	28	57.0	30.2	57.2	108.0	444.5	242.9	381.0	30.2	57.2	114.3	13.1	50.5	52.1
1 - 1/4	32	64.1	33.7	63.5	120.7	493.7	269.9	419.1	30.2	63.5	127.0	16.4	56.9	58.4
1 - 3/8	35 - 36	71.1	36.9	63.5	133.4	539.8	296.9	460.4	33.3	63.5	133.4	21.6	63.2	65.0
1 - 1/2	38	78.1	40.1	69.9	146.1	590.6	323.9	501.7	36.5	76.2	146.1	29.2	69.6	71.4
1 - 3/4	44 - 45	86.0	47.2	88.9	171.5	689.0	377.8	609.6	42.9	88.9	177.8	42.4	75.9	77.7
2	48 - 51	99.9	53.6	95.3	203.2	798.5	431.8	679.5	46.0	101.6	203.2	67.1	88.6	90.4
2 - 1/4	58	113.0	59.9	108.0	171.5	835.0	485.8	704.9	65.1	114.3	222.3	78.5	100.3	102.1
2 - 1/2	64	125.2	67.5	108.0	171.5	879.5	498.5	749.3	65.1	114.3	222.3	105.7	110.5	112.3
3	76	151.4	80.4	133.4	219.1	1052.5	603.3	904.9	76.2	146.1	241.3	173.2	133.1	134.9

CAUTION: Carbon Steel Closed Swage Sockets are recommended for use on 6 × 19 or 6 × 37 IPS or XIP, (EIP), XXIP (EEIP) IWRC regular lay ropes. Before using Swage Sockets with any other type lay, construction, or grade of wire rope, or strand, it is recommended that a test assembly be destructively tested to prove the adequacy of the assembly.