

Clevis & Clevis Turnbuckles


Product Description

- AS2319 - 2001
- 6:1 Safety Factor
- Grades L, P & S
- Testing and Certification
- Galvanized
- Manufactured using only heat certified Australian Steel (AS1442/AS1444)



Available on Request


- Locknuts

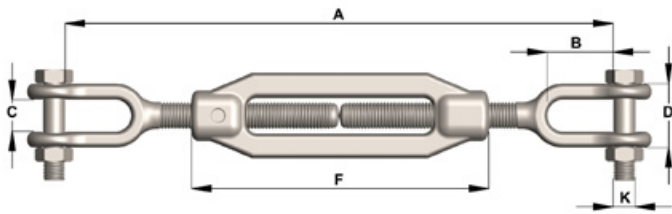

Townley Drop Forge maintains a NATA Accredited Laboratory (Test Lab No. 13554) and an AS/NZS ISO9001 Certified QMS (Certificate number FS 604897)

Dimensions and Working Load Limits (WLL) Metric - Grades L, P & S

Nominal Size	A Closed	A Open	B	C	D	F	K	Grade L WLL	Grade P WLL	Grade S WLL
M10	240	350	30	14	30	150.0	10	0.3t	0.6t	0.8t
M12	335	470	36	15	35	190.5	10	0.5t	1t	1.2t
M16	355	490	45	20	40	204.0	12	0.75t	1.6t	2t
M20	440	580	46	22	46	216.5	16	1.25t	2.5t	3.2t
M24	440	585	59	30	58	232.0	20	2.5t	4t	5t
M33	630	780	78	38	76	252.0	27	5t	8t	10t

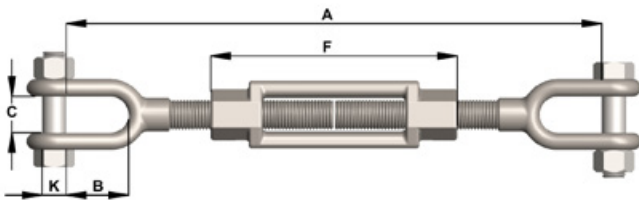

Dimensions and Working Load Limits (WLL) BSW - Grade L

Nominal Size	A Closed	A Open	B	C	F	K	Grade L WLL
1 1/4"	520	670	70	38	255	25	5t
1 1/2"	550	740	70	48	275	32	6t

Subject to technical modifications