


Shank Hooks BS2903 / DIN15401

Product Description

- High Tensile Alloy Steel
- Hardened and Tempered
- Machined to Order



Townley Drop Forge maintains a NATA Accredited Laboratory (Test Lab No. 13554) and an AS/NZS ISO9001 Certified QMS (Certificate number FS 604897)

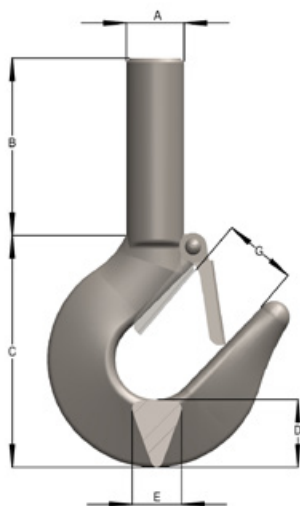

BS2903 Dimensions and Working Load Limits

WLL	A	B	C	D	E	G	Weight (kg)
2.5t	29	102	137	48	29	35	2.0
3.2t	33	95	168	54	33	37	2.9
6.3t	46	254	210	72	46	48	6.9
12.5t	64	343	287	97	64	50	23.6

DIN15401 Dimensions and Working Load Limits

Grade P WLL	Grade V WLL	A	B (P/V)	C	D	E	G	L (P/V)	Hook No.
5t	10t	42	90	190	58	45	50	310	2.5
8t	16t	48	150	215	67	53	56	395	4
10t	20t	53	200	240	75	60	63	460	5
12.5t	25t	60	200	270	85	67	71	525	6
16t	32t	67	200	305	95	75	80	520	8
20t	40t	75	270/380	327	106	85	90	640/765	10
25t	50t	85	210/400	370	118	95	100	650/830	12
32t	63t	95	350/400	412	132	106	112	810/890	16
40t	80t	106	400	480	150	118	125	980/830	20
50t	100t	118	400	530	170	132	140	935	25
63t	125t	132	360/400	590	190	150	160	1150/1050	32
80t	160t	150	400	660	212	200	180	1150	40