



# Swivel Hook Light Duty

## Product Description

- ✓ Forged - hardened and tempered
- ✓ Standard Bearings for most common applications
- ✓ Load rated
- ✓ Meets requirements of ASME B30.10 and EN 1677



Townley Drop Forge maintains a NATA Accredited Laboratory (Test Lab No. 13554) and an AS/NZS ISO9001 Certified QMS (Certificate number FS 604897)

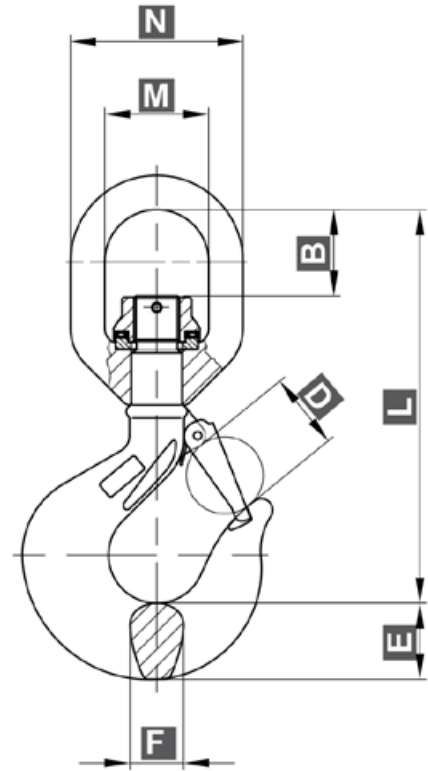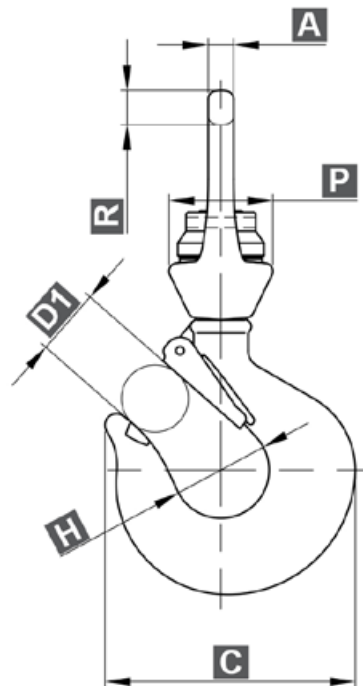

## Dimensions and Working Load Limits

Part No.	WLL	Grade	Chain (mm)	A	B	C	D	D1	E	F	H	L	M	N	P	R	Weight (kg)
SSH08	0.8t	4	6	10	34	77	24	20	21	15	31	133	38	63	39	12.5	0.8
SSH160	1.6t	8	7	10	31	82	26	22	23	18	34	140	38	63	39	12.5	1.8
SSH250	2.5t	8	8	12.5	42	94	27	23	27	23	38	163	47	79	48	16	2.2
SSH320	3.2t	8	10	12.5	40	106	32	27	31	23	42	172	47	79	48	16	2.8
SSH540	5.4t	8	13	15	50	132	40	35	37	30	50	213	58	96	60	19	4.1