

Clevis & Eye Turnbuckles


Product Description

- AS2319 - 2001
- 6:1 Safety Factor
- Grades L, P & S
- Fully Tested and Certified to AS2319
- Galvanized
- Manufactured using only heat certified Australian Steel (AS1442/AS1444)



Available on Request


- Lock Nuts

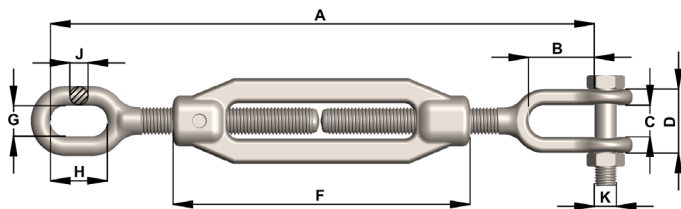

Townley Drop Forge is both NATA Accredited (Test Lab No. 13554) and AS/NZS ISO9001 Certified (Certificate number FS 604897).

Dimensions and Working Load Limits (WLL) - Metric - Grades L, P & S

| Nominal Size | A Closed | A Open | B | C | D | F | G | H | J | K | Grade L WLL | Grade P WLL | Grade S WLL |
|--------------|----------|--------|----|----|----|-------|----|----|----|----|-------------|-------------|-------------|
| M10 | 235 | 340 | 30 | 14 | 30 | 150 | 11 | 21 | 7 | 10 | 0.3t | 0.6t | 0.8t |
| M12 | 330 | 470 | 36 | 15 | 35 | 190.5 | 15 | 30 | 9 | 10 | 0.5t | 1t | 1.2t |
| M16 | 355 | 490 | 45 | 20 | 40 | 204 | 17 | 36 | 12 | 12 | 0.75t | 1.6t | 2t |
| M20 | 390 | 520 | 55 | 22 | 46 | 215.5 | 21 | 42 | 14 | 16 | 1.25t | 2.5t | 3.2t |
| M24 | 445 | 580 | 59 | 30 | 58 | 232 | 25 | 51 | 17 | 20 | 2.5t | 4t | 5t |
| M33 | 643 | 793 | 78 | 38 | 76 | 252 | 33 | 70 | 24 | 27 | 5t | 8t | 10t |

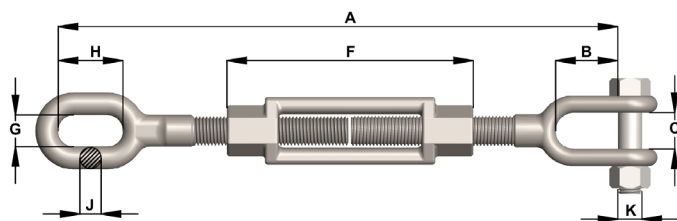

Dimensions and Working Load Limits (WLL) - BSW

| Nominal Size | A Closed | A Open | B | C | F | G | H | J | K | Grade L WLL |
|--------------|----------|--------|----|----|-----|----|----|----|----|-------------|
| 1 1/4" | 525 | 690 | 70 | 38 | 255 | 33 | 67 | 22 | 25 | 5t |
| 1 1/2" | 570 | 740 | 70 | 48 | 275 | 38 | 72 | 25 | 32 | 6t |

Subject to technical modifications