

Eye & Eye Turnbuckles


Product Description

- AS2319 - 2001
- 6:1 Safety Factor
- Grades L, P & S
- Testing and Certification
- Galvanized
- Manufactured using only heat certified Australian Steel (AS1442/AS1444)



Available on Request


- Locknuts

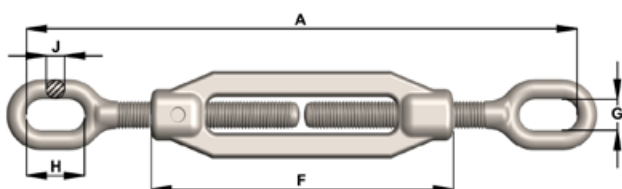

Townley Drop Forge maintains a NATA Accredited Laboratory (Test Lab No. 13554) and an AS/NZS ISO9001 Certified QMS (Certificate number FS 604897)

Dimensions and Working Load Limits (WLL) Metric - Grades L, P & S

Nominal Size	A Closed	A Open	F	G	H	J	Grade L WLL	Grade P WLL	Grade S WLL
M10	230	335	150.0	11	21	7	0.3t	0.6t	0.8t
M12	330	470	190.5	15	30	9	0.5t	1t	1.2t
M16	350	485	204.0	17	36	12	0.75t	1.6t	2t
M20	385	515	216.5	21	42	14	1.25t	2.5t	3.2t
M24	440	570	232.0	25	51	17	2.5t	4t	5t
M33	656	806	252.0	33	70	24	5t	8t	10t

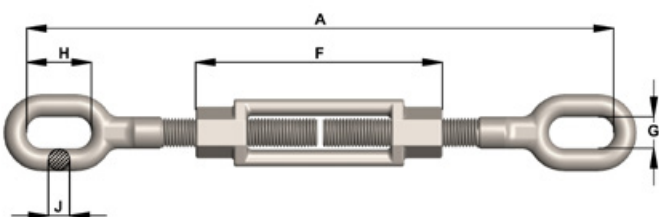

Dimensions and Working Load Limits (WLL) BSW - Grade L

Nominal Size	A Closed	A Open	F	G	H	J	Grade L WLL
1 1/4"	570	720	255	33	67	22	5t
1 1/2"	600	740	275	38	72	25	6t

Subject to technical modifications